

### 43" Full HD professional large format display with USB media playback

Set in a slim bezel, the iiyama LE4341S is a professional digital signage display offering 18/7 operating time and landscape orientation.

This Full HD and fanless IPS display guarantees great viewing from all angles, high brightness and exceptional colour clarity. With the built-in media player you can play your favourite music and show your most beautiful videos, photos and images directly on screen.



Media player

Play your favourite music and show your most beautiful videos, photos and images directly on screen from a flash drive or internal memory with the built-in media player.



LAN Control

LAN control enables making adjustments in the display OSD menu through your network (software not included).

## 01 DISPLAY CHARACTERISTICS

|                                  |   |
|----------------------------------|---|
| Design                           | Thin bezel  |
| Diagonal                         | 42.5", 108cm  |
| Panel                            | IPS, haze 1%  |
| Native resolution                | 1920 x 1080 (2.1 megapixel Full HD)                                   |
| Aspect ratio                     | 16:9  |
| Panel brightness                 | 350 cd/m <sup>2</sup>   |
| Static contrast                  | 1200:1  |
| Response time (GTG)              | 8ms   |
| Viewing zone                     | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support                   | 1.07G (8 Bits+FRC) (NTSC 72%)   |
| Horizontal Sync                  | 30 - 83kHz  |
| Viewable area W x H              | 941.2 x 529.4mm, 37.1 x 20.8"   |
| Bezel width (sides, top, bottom) | 14mm, 14mm, 14mm  |
| Pixel pitch                      | 0.490mm   |
| Bezel colour and finish          | black, glossy   |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                        |                                      |
|------------------------|--------------------------------------|
| Analog signal input    | VGA x1 (max. 1920x1080 @60Hz)        |
| Digital signal input   | HDMI x3 (max. 3840x2160 @60Hz)       |
| Audio input            | Mini jack x1                         |
| Monitor control input  | RS-232c x1<br>RJ45 (LAN) x1<br>IR x1 |
| Audio output           | RCA (L/R) x1<br>Speakers 2 x 10W     |
| Monitor control output | RS-232c x1<br>IR loop through x1     |
| HDCP                   | 2.2                                  |
| USB ports              | x1 (2.0, FW update support)          |

## 03 FEATURES

|                              |         |
|------------------------------|---------|
| Max. non-stop operating time | 18/7    |
| Anti image retention         | yes     |
| Media playback               | yes     |
| Housing (bezel)              | plastic |

## 04 GENERAL

|                 |   |
|-----------------|---|
| OSD languages   | EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL  |
| Control buttons | Power, Mute, Input, Plus, Minus, Up, Down, Menu   |
| User controls   | picture (picture format, colour temp., noise reduction, dynamic contrast, gamma, brightness, black level, colour, contrast, hue, sharpness, RGB range, reset), Sound (treble, bass, balance, speaker, audio output, reset), general settings 1 (menu languages, clock, schedule, HDMI CEC link, HDMI modes, communication setting), screen (auto adjust, clock, phase, H. position, V. position, reset), general settings 2 (auto power off, network standby, power management, auto signal detection, auto play, local KB lock, RC lock, monitor ID, LED, pixel shift, information, factory reset) |

## 05 MECHANICAL

|                             |                                   |
|-----------------------------|-----------------------------------|
| Orientation                 | landscape                         |
| Fanless design              | yes                               |
| VESA mounting               | 400 x 400mm                       |
| Operation temperature range | 0°C - 40°C                        |
| Storage temperature range   | - 20°C - 60°C                     |
| MTBF                        | 50000 hours (excluding backlight) |

## 06 ACCESSORIES INCLUDED

|                |                                 |
|----------------|---------------------------------|
| Cables         | power, HDMI, RS-232c            |
| Guides         | quick start guide, safety guide |
| Remote control | yes (batteries included)        |

## 07 POWER MANAGEMENT


|                   |   |
|-------------------|---|
| Power supply unit | internal                                  |
| Power supply      | AC 100 - 240V, 50/60Hz                    |
| Power usage       | 77W typical, 0.5W stand by, 0.3W off mode |

## 08 SUSTAINABILITY

|   |   |
|---|---|
| Regulations   | CB, CE, TÜV-Bauart, EAC, RoHS support, ErP, WEEE, REACH |
| Energy efficiency class (Regulation (EU) 2017/1369) | G   |
| REACH SVHC  | above 0.1%: Lead  |

## 09 DIMENSIONS / WEIGHT

|                              |                    |
|------------------------------|--------------------|
| Product dimensions W x H x D | 972 x 560 x 67.5mm |
| Box dimensions W x H x D     | 1070 x 690 x 139mm |
| Weight (without box)         | 8.8kg              |
| Weight (with box)            | 12.3kg             |
| EAN code                     | 4948570120925      |

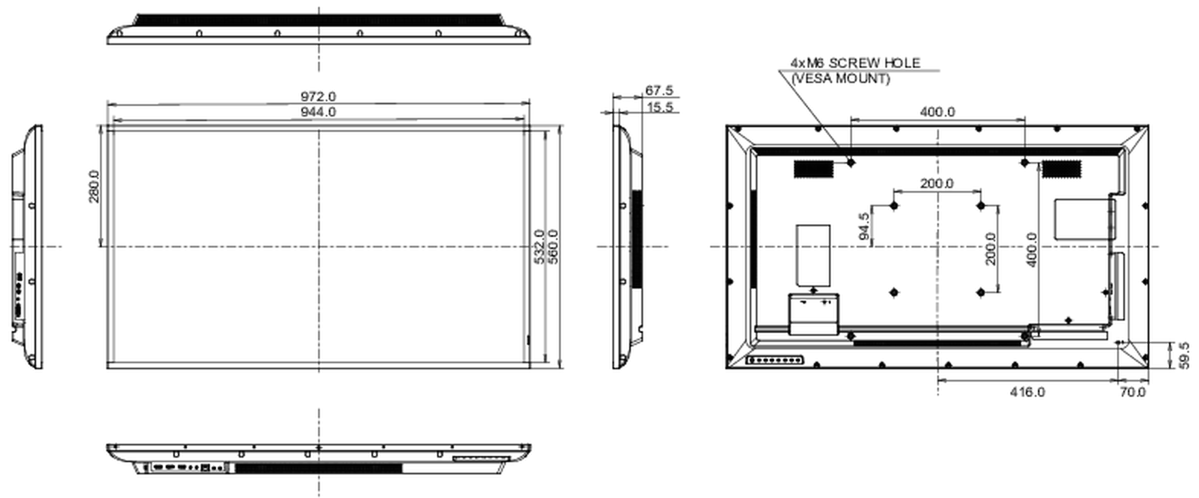

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED