




**27” Full HD VA panel with 100Hz refresh rate and 150mm height adjustable stand**

The ProLite XUB2794HSU with VA panel ensures accurate and consistent colour reproduction with wide viewing angles. With a stylish slim bezel, the monitor would make an ideal choice for multi-monitor set ups for enhanced productivity. The 100Hz refresh rate together with AdaptiveSync function provides very tangible improvement in image smoothness. This monitor is also equipped with speakers, 2 port USB 2.0 hub, headphone socket, HDMI and DisplayPort connections, a blue light reducer function to reduce eye fatigue and an ergonomic 150mm height adjustable stand for optimal user comfort. It makes this 27” XUB2794HSU-B6 display ideal for any office or home office application, including occasional gaming.



VA

VA panel technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



HAS (150mm) + PIVOT

With a height adjustable stand you will create an ergonomic work posture and position that meets all health and safety requirements. This will not only prevent any health issues but will also increase your productivity. The pivot function allows the screen to rotate from landscape to portrait orientation. This functionality can be useful if the application requires more height than width.

## 01 DISPLAY CHARACTERISTICS

|                      |   |
|----------------------|---|
| Design               | 3-side borderless   |
| Diagonal             | 27", 68.5cm   |
| Panel                | VA matrix, matte finish   |
| Native resolution    | 1920 x 1080 @100Hz (2.1 megapixel Full HD)                            |
| Aspect ratio         | 16:9  |
| Panel brightness     | 250 cd/m <sup>2</sup>   |
| Static contrast      | 4000:1  |
| Advanced contrast    | 80M:1   |
| Response time (MPRT) | 1ms   |
| Viewing zone         | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support       | 16.7mIn (sRGB: 96%; NTSC: 72%)  |
| Horizontal Sync      | 30 - 110kHz   |
| Viewable area W x H  | 597.9 x 336.3mm, 23.5 x 13.2"   |
| Pixel pitch          | 0.311mm   |
| Colour               | matte, black  |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                     |                           |
|---------------------|---------------------------|
| Signal input        | HDMI x1<br>DisplayPort x1 |
| USB HUB             | x2 (2.0)                  |
| HDCP                | yes                       |
| Headphone connector | yes                       |

## 03 FEATURES

|                       |   |
|-----------------------|---|
| Blue light reducer    | yes   |
| Flicker free          | yes   |
| Adaptive Sync support | yes   |
| Extra                 | i-style Colour  |
| OSD languages         | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL  |
| Control buttons       | Power, Menu, Up/Right/Volume, Down/Left/i-Style colour, Input/Exit  |
| User controls         | picture adjust (brightness, contrast, Eco, ACR, OD, MBR, AdaptiveSync), colour settings (i-Style colour, blue light reducer, colour temp., user preset), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, RGB range, LED, information), input select (source), audio settings (volume, mute) |
| Speakers              | 2 x 2W  |
| Convenience           | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OS X  |

## 04 MECHANICAL

|                              |   |
|------------------------------|---|
| Display position adjustments | height, swivel, tilt, pivot (rotation both sides) |
| Height adjustment            | 150mm   |
| Rotation (PIVOT function)    | 90°   |
| Swivel stand                 | 360°; 180° left; 180° right                       |
| Tilt angle                   | 23° up; 5° down                                   |
| VESA mounting                | 100 x 100mm                                       |

Cable management system

yes

## 05 ACCESSORIES INCLUDED

Cables

power, USB, HDMI

Other

quick start guide, safety guide

## 06 POWER MANAGEMENT

Power supply unit

internal

Power supply

AC 100 - 240V, 50/60Hz

Power usage

20.5W typical, 0.5W stand by, 0.3W off mode

## 07 SUSTAINABILITY

Regulations

TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA

Energy efficiency class (Regulation (EU) 2017/1369)

E

REACH SVHC

above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D

613.5 x 401 (551) x 224.5mm

Box dimensions W x H x D

691 x 142 x 447mm

Weight (without box)


5.3kg

Weight (with box)

6.6kg

EAN code

4948570122684

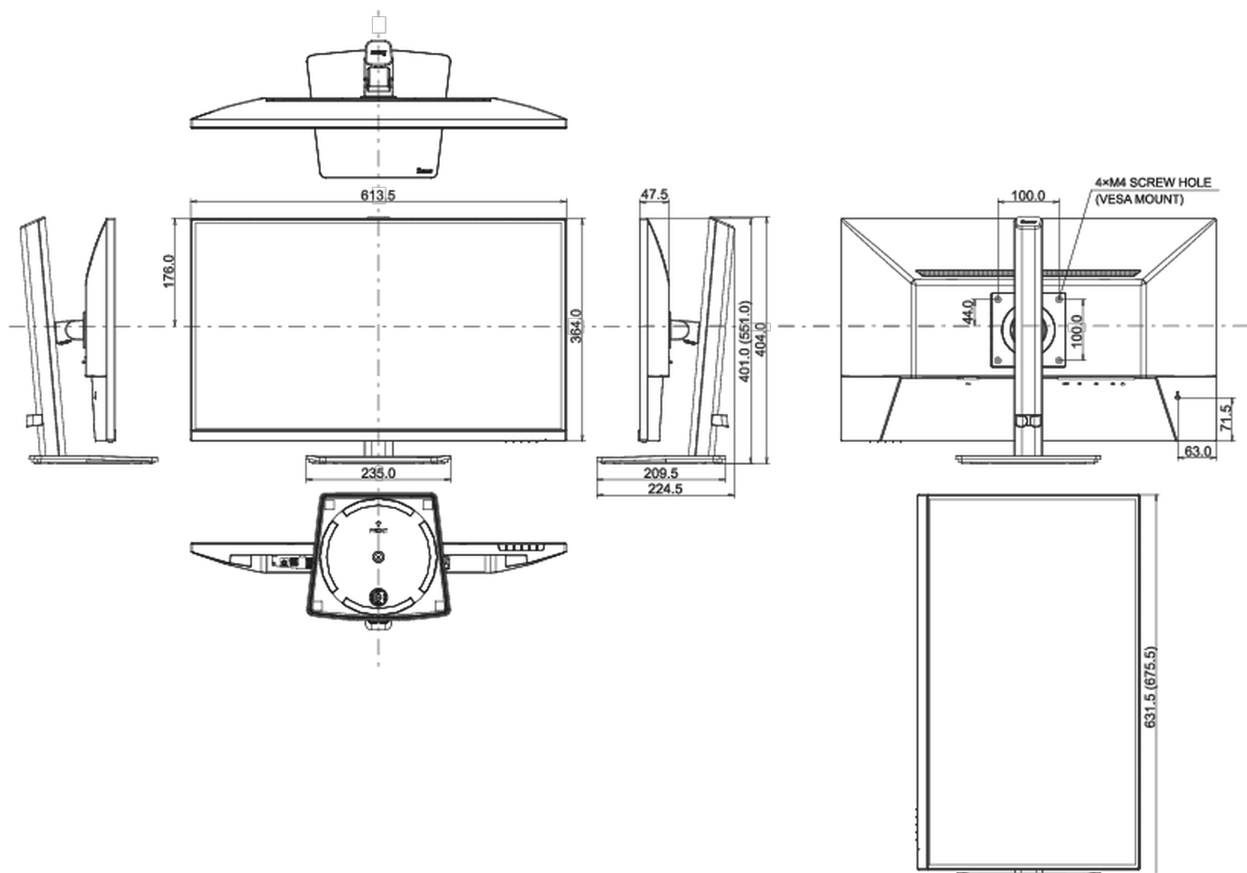

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED